




Front Range Flatbed Bodies

***Extracted from Full Scelzi Catalog
April 2022***

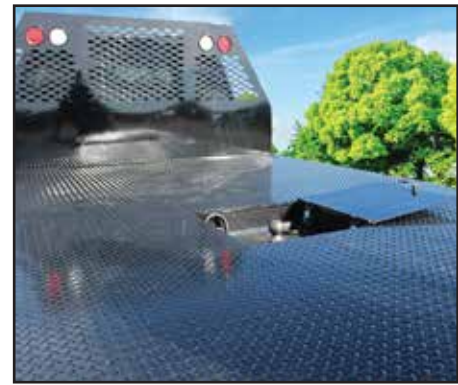

Integrated gooseneck hitch with 2-5/16" ball plus side flip lid.

Photos may contain optional equipment verify your specifications when you order.

Standard Body Lengths and Specifications

Bed SIZE	Cab to Axle (CA)	Rear Wheel	Hitch	Tool Boxes
7 ft x 8.5 ft	56"	Single	Factory hitch and 7 way RV plug	30" Long x 18" High x 12" Deep tool installed in front of rear wheels
8 ft x 8.5 ft	56"	Dual	Factory hitch and 7 way RV plug	30" Long x 18" High x 18" Deep tool installed in front of rear wheels
8 ft x 9.5 ft	60"	Dual	Scelzi Class 5 hitch and 7 way RV plug	36" Long x 18" High x 18" Deep tool installed in front of rear wheels
8 ft x 11.5 ft	84"	Dual	Scelzi Class 5 hitch and 7 way RV plug	48" Long x 18" High x 18" Deep tool installed in front of rear wheels

Standard Equipment For All Sizes

- 1/8" Diamond Plate Cargo Floor & Sides
- Rear and Front 1/8" smooth steel tail plate w/6" tapered corners @ rear
- Front smooth steel 6" rail
- 4" x1/8" formed cross-members 6" integrated thick
- Longsills AJ Baer tapered stake pockets sides & rear
- Bolt-on tapered head board with LED seal
- Beam lights built into top corners of headboard – stop, turn, tail and back-up
- Rear tail apron with custom ICC Dock
- Bumper LED lights – stop, turn, tail and back-up
- Camera – installation
- All LED marker lights
- Integrated goose neck hitch with 2 5/16 ball recessed in floor with slide flip lid with 7 way RV plug #12707
- 1/2" Rope hook installed
- Black powder coated

